
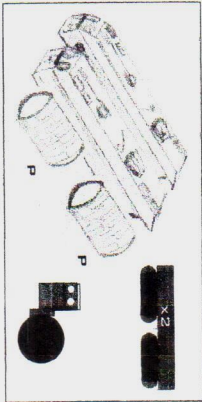


BOOSTER


Step#1: Booster add-on

Locate part 'O', main booster body. Next locate part 'P', there should be 4 of them. They mount with the saddles gluing to part 'O', and hanging half way off. (see picture). The ends of the booster body and the ends of part 'P' should be even.

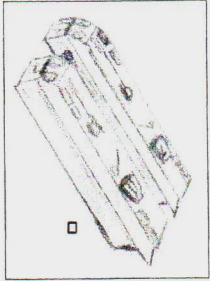



Step#2

Locate parts (2x) 'T'. Paying attention to the orientation of the parts fit to the rear of booster body. The rear of the booster is notched and one end of the part 'T' is notched to fit this.

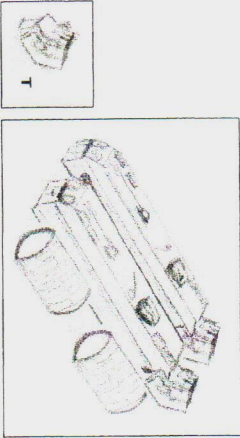


Step#3

Locate part 'R', there should be two engine bells. These glue to the rear of the engine housing (part 'T').





Step#4

Locate (2x) part 'S'. These have two fins running their length in the center. These glue to the main booster body with the saddles facing down. There should be a small "x" indicating their position.

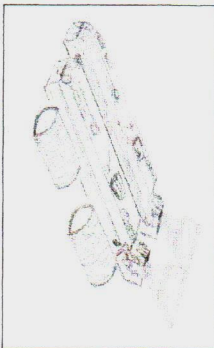

Step#5

Locate part 'U' (2x). These are small stubby tanks. The saddles glue to the booster side wall and are centered between the two outboard tanks (part 'P'). From both sides of part 'U' there should be a 1mm dia rod bent down to the outboard tanks (see pic).

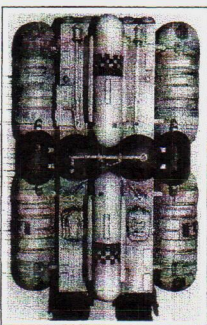
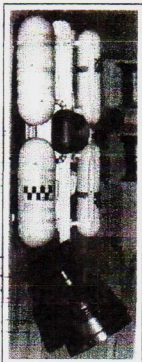


Locate parts 'V' (2x). These are two flat small discs. These attach flat to the surfaces as shown above. The rod should be 1mm dia and shaped to look as above.

BOOSTER


Step#6

Locate part 'W'. This glues to the bottom of the main booster body, just aft of the first post which joins them. (see pic).

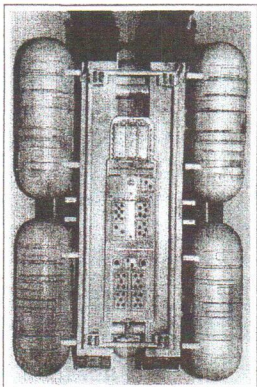

Step#7

You must drill 4 (2mm dia.) of the mounting holes for the booster support grab legs. If you are assembling the Eagle kit without modifications follow the dimensions given here. If you have narrowed your ladder frame to the correct width, test fit and then drill your own holes using the standard here as a guide. The legs should stick out 5 mm. from the bottom of the main booster.

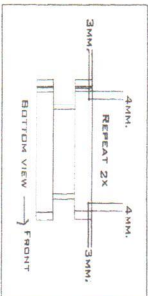

Paint and Detail Guide: Use the following as reference for painting your accessory set and tank, but remember to paint it as suits you! You will notice (most notably in the pod) some detail differences. These have been left out on purpose. As the kit stands it is a very good representation of the parts from the second season. However some of you will want to detail this set up, so I left some things off in order to give you something "more" to do. Of notable missing details : on the tank: the spider lattice work around the radar dish, also I used a standard Alpha door for the rear of the tank - I know of no photo of the original door! On the booster pod- fine 1mm dia rod on the two small tanks atop parts 'P' and the rod on the two flat discs. The small and subtle "shocks" on the outboard saddle arm of parts "P". On the pod, I have left the incorrect AMT underside thrusters on the pod bottom, these should be the same as all the others but this way it matches with folks who do not alter the Amr/Ertl kit. There should be other hatches around the two side doors on the walkway side of the pod. There should be a small dia rod placed just under the pod eaves as well. And finally the biggest difference! There should be 8 half tanks (originally based on 1/24 Gemini tanks) located around the base of the pod.

